





**ID813101BEK** (3.000 /4.000 /6.000 K - 7 W)

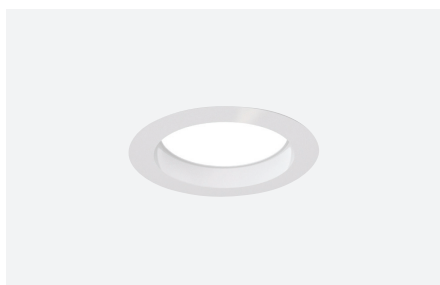

**ID813121BEK** (3.000 /4.000 /6.000 K - 14 W)

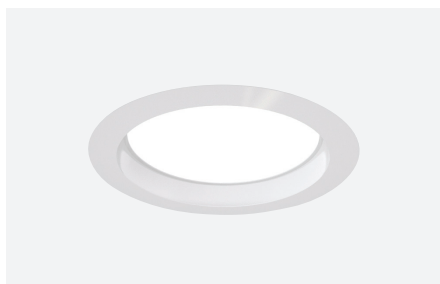


**ID813131BEK** (3.000 /4.000 /6.000 K - 20 W)



**ID813141BEK** (3.000 /4.000 /6.000 K - 30 W)



**ID813151BEK** (3.000 /4.000 /6.000 K - 40 W)

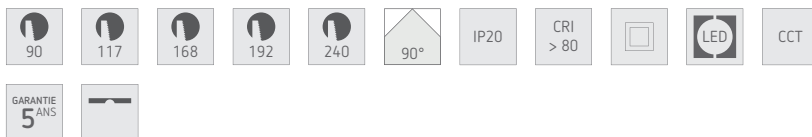

### Caractéristiques techniques

**CCT:** blanc chaud (3.000 K) / blanc naturel (4.000 K) / blanc froid (6.500 K)

**3 appareils en 1 : choix du blanc via un switch**



Matériau : aluminium  
Finition : blanc mat

10 W - 14 W - 20 W - 30 W - 40 W

230 V AC (alimentation non dimmable incluse)

Options : - 350 mA dimmable 0-10 V DC - DALI - PUSH DIM  
- 700 mA dimmable 0-10 V DC - DALI - PUSH DIM  
- 1.050 mA dimmable 0-10 V DC - DALI - PUSH DIM

L70 B30 48.000 heures

± 20.000 ON / OFF


Avec diffuseur polycarbonate opalin

Fixation avec ressorts

Test au fil incandescent : 650°

Boîtier de connexion rapide

### Dimensions (mm)

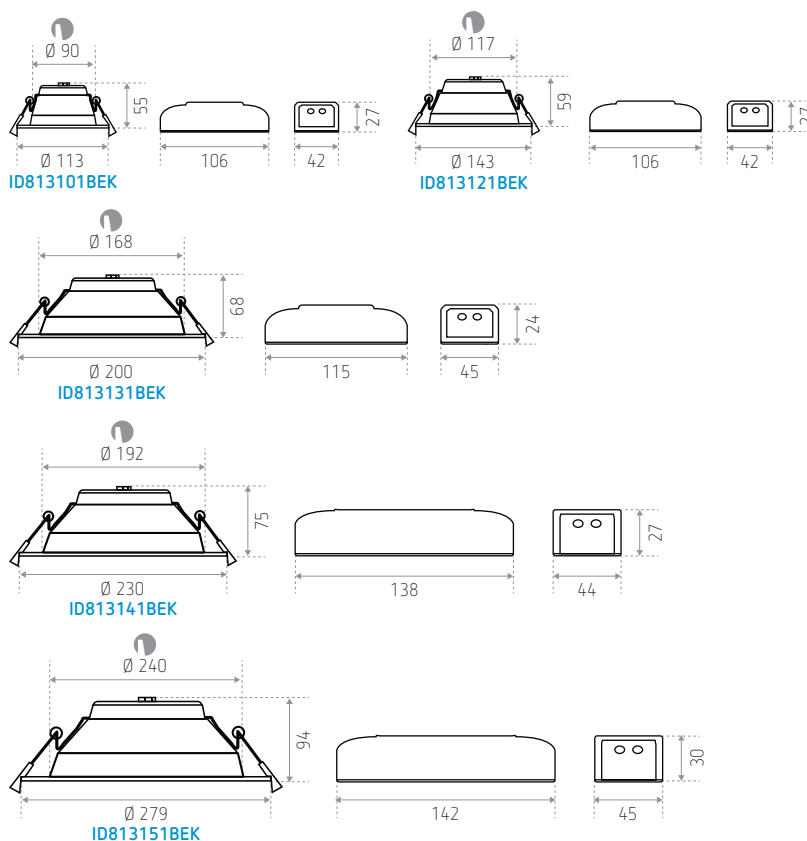

## 3 teintes de lumière en 1 downlight **SAN DIEGO**

IDT LIGHT

RÉFÉRENCE(S)	PUISSANCE	ALIMENTATION	LUMEN			ENCASTREMENT
			3.000K	4.000 K	6.000 K	
<b>ID813101BEK</b> (LO SAN DIEGO 10)	10 W	350 mA	780 lm	920 lm	840 lm	Ø 90 mm
<b>ID813121BEK</b> (LO SAN DIEGO 14)	14 W	350 mA	970 lm	1.130 lm	1.040 lm	Ø 117 mm
<b>ID813131BEK</b> (LO SAN DIEGO 20)	20 W	700 mA	1.600 lm	1.880 lm	1.720 lm	Ø 168 mm
<b>ID813141BEK</b> (LO SAN DIEGO 30)	30 W	700 mA	2.650 lm	3.140 lm	2.810 lm	Ø 192 mm
<b>ID813151BEK</b> (LO SAN DIEGO 40)	40 W	1.050 mA	3.380 lm	4.140 lm	3.690 lm	Ø 240 mm