


3 kleuren van licht in 1 downlight

SAN DIEGO


IDT LIGHT®



ID813101BEK (3.000 /4.000 /6.000 K - 7 W)

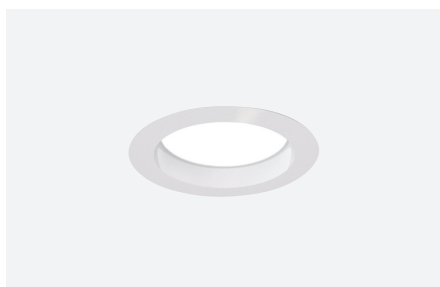


ID813121BEK (3.000 /4.000 /6.000 K - 14 W)

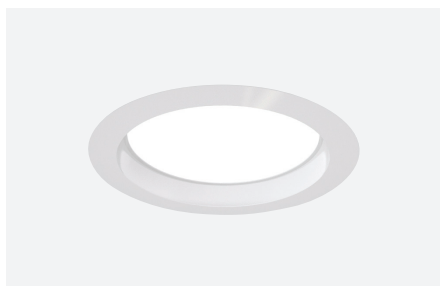


ID813131BEK (3.000 /4.000 /6.000 K - 20 W)



ID813141BEK (3.000 /4.000 /6.000 K - 30 W)

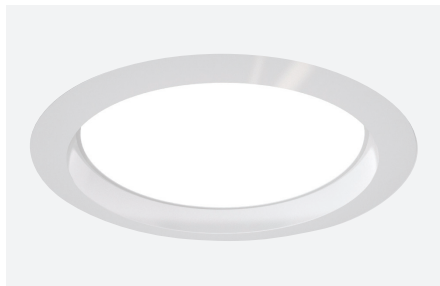

ID813151BEK (3.000 /4.000 /6.000 K - 40 W)

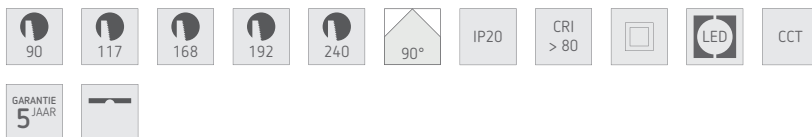

Technische gegevens

CCT : warm wit (3.000 K) /natuurlijk wit (4.000 K) /koud wit (6.500 K)

3 apparaten in 1 : keuze uit wit via een switch



Materiaal : aluminium
Afwerking : wit mat

10 W - 14 W - 20 W - 30 W - 40 W

230 V AC (geïntegreerde voeding - niet dimbaar)

Opties : - 350 mA dimbaar, 0-10 V DC - DALI - PUSH DIM
- 700 mA dimbaar, 0-10 V DC - DALI - PUSH DIM
- 1.050 mA dimbaar, 0-10 V DC - DALI - PUSH DIM

L70 B30 48.000 uren

± 20.000 ON /OFF


Met opaalkleurige verstrooier

Bevestiging met veren

Gloeidraadtest : 650°

Quickconnect doos

Afmetingen (mm)

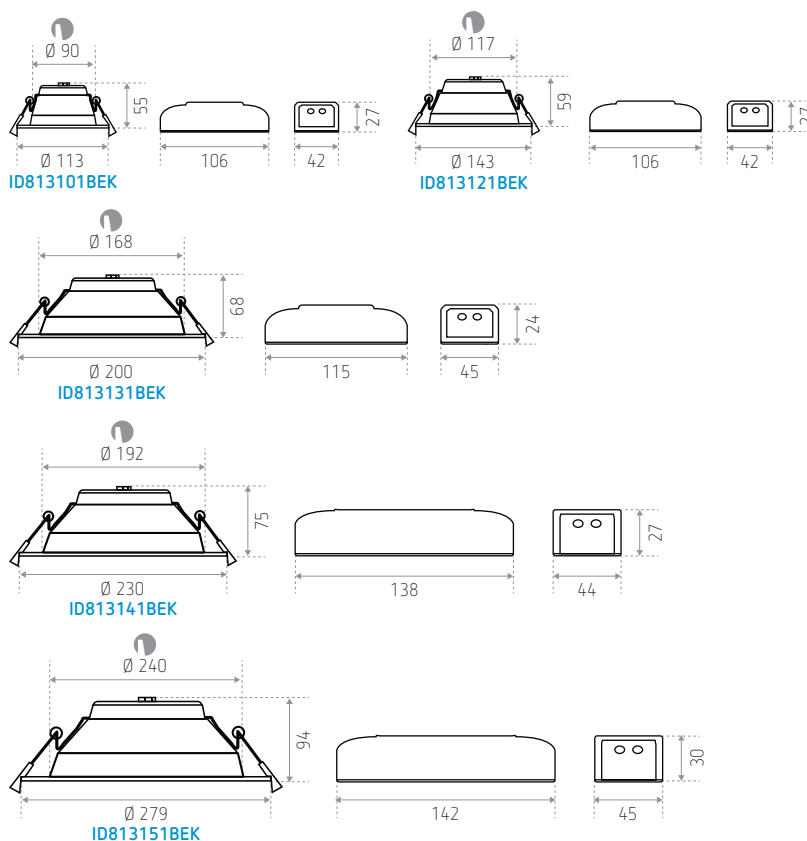

3 kleuren van licht in 1 downlight **SAN DIEGO**

IDT LIGHT

REFERENTIE(S)	VERMOGEN	VOEDING	LUMEN			INBOUW
			3.000K	4.000 K	6.000 K	
ID813101BEK (LO SAN DIEGO 10)	10 W	350 mA	780 lm	920 lm	840 lm	Ø 90 mm
ID813121BEK (LO SAN DIEGO 14)	14 W	350 mA	970 lm	1.130 lm	1.040 lm	Ø 117 mm
ID813131BEK (LO SAN DIEGO 20)	20 W	700 mA	1.600 lm	1.880 lm	1.720 lm	Ø 168 mm
ID813141BEK (LO SAN DIEGO 30)	30 W	700 mA	2.650 lm	3.140 lm	2.810 lm	Ø 192 mm
ID813151BEK (LO SAN DIEGO 40)	40 W	1.050 mA	3.380 lm	4.140 lm	3.690 lm	Ø 240 mm