


**ID551201BZC** (2.700 K - IP20)  
**ID551205BZE** (3.000 K - IP20)  
**ID551202BZD** (4.000 K - IP20)



**ID552201BZC** (2.700 K - IP67)  
**ID552205BZE** (3.000 K - IP67)  
**ID552202BZD** (4.000 K - IP67)

Compatibele profielen



### Technische gegevens

Warm wit (2.700 K of 3.000 K) of natuurlijk wit (4.000 K)

9,6 W / m = 48 W / 5 m

120 LEDs / m = 600 LEDs / 5 m

24 V DC voeding **verplicht** (DIM )

Compatibele radiocontroller :

- zender **ID836359BZZ** (LO KINGSTON EM MONO)

- ontvanger **ID836060ZZZ** (LO KINGSTON REC RGB-MONO-TW)

Compatibele profielen

**Voor NAPOLI - IP20** : **ALBI, ALMADA, AVEIRO, BARI, BINCHE, BOOM, CALVI, CUBA, CUBA 2.0, DOUR, HOTTON, HUY, LEON, LUGO, MALTA, MERIBEL, PALMA, PORTO, SINES, SPA** of **VIGO**

**Voor NAPOLI - IP67** : **ALBI, BARI, BEJA, BOOM, DOUR, HUY, LUGO, MALTA, MERIBEL, PORTO, SPA** of **VIGO**

L70 B30 50.000 uren

> 30.000 ON / OFF

Knipbaar om de 50 mm / 6 LEDs

Aansluitkabels links en rechts


Bevestiging met dubbelzijdige kleefband (voor buitenmontage wordt sterk aanbevolen om naast de dubbelzijdige, lijmpunten aan te brengen op de strip)

Maximaal aantal van strips na elkaar : 2 (10 m)


Werkings temperatuur : -20 tot +45 °C

### Afmetingen (mm)

IP20

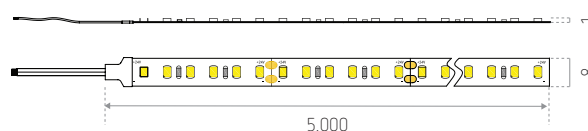

IP67

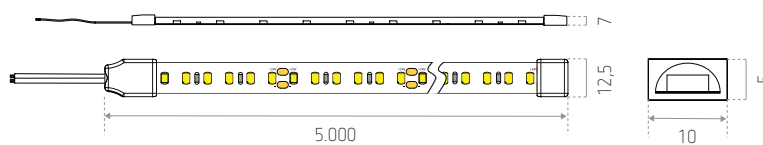

REFERENTIE(S)	BESCHERMING	KLEUR	LUMEN
<b>ID551201BZC</b> (LO NAPOLI 2700K)		2.700 K	750 lm / m
<b>ID551205BZE</b> (LO NAPOLI WW)	IP20	3.000 K	790 lm / m
<b>ID551202BZD</b> (LO NAPOLI NW)		4.000 K	820 lm / m
<b>ID552201BZC</b> (LO NAPOLI IP67 2700K)		2.700 K	710 lm / m
<b>ID552205BZE</b> (LO NAPOLI IP67 WW)	IP67	3.000 K	750 lm / m
<b>ID552202BZD</b> (LO NAPOLI IP67 NW)		4.000 K	780 lm / m